

# HYBRID HEAT PUMP WATER HEATER

EE66WP35P S

Electric Hybrid Heat Pump Water Heater – Dual Vent



66 Gallons



## PRODUCT DIMENSIONS

Height	70-1/2"
Diameter	25-1/2"

## MORE EASY-TO-USE FEATURES

### LIFETIME LIMITED WARRANTY

Lifetime Limited Warranty supported by a 1-year labor, 10-year parts and 15-year tank warranty to provide peace of mind.

### LONGER LASTING

Lasts up to 2 times longer than standard electric tank-style water heaters.

### LED DIGITAL DISPLAY

Conveniently adjust temperature and operating modes with the LED digital control and display.

Available in:



Stainless  
(S)

## SIGNATURE FEATURES



### ENERGY EFFICIENCY

Uses up to 70% less energy than standard electric tank-style water heaters.



### PREMIUM STAINLESS STEEL

Durable premium stainless steel exterior and interior tank.



### ENERGY STAR®

Exceeds current energy standards, providing a more energy efficient water heating solution for your home.



### NORTHERN CLIMATE TIER 2 CERTIFICATION

Exceeds current ENERGY STAR® standards providing the most versatile, quiet and efficient water heater in its class.

# HYBRID HEAT PUMP WATER HEATER

EE66WP35P S



## ELECTRIC HYBRID HEAT PUMP WATER HEATER

### CONTROL PANEL FEATURES

Mechanical Button Controls	Yes
LED Digital Display	Yes
Temperature Display Mode	°F

### PERFORMANCE

Energy Factor (Hybrid-AUTO Mode)	2.35
First Hour Rating (Hybrid-AUTO Mode) (Gallons)	70

### FEATURES

Air Filter	Yes
Anode Rod	Yes
Condensate Overflow Drain	Yes
Default Temperature (°F)	120
Heat Pump Ambient Temp Operating Range (Factory Default) (°F)	32-120
Heat Pump Ambient Temp Operating Range (Programmable) (°F)	20-120
Operating Modes	Auto (Default), Econ, Heater
Operating Noise (Heat Pump - AUTO/ECON Mode)	48 DBA
Recirculation Compatible	Yes
Temperature Setting Range (°F)	90-135

### ACCESSORIES

Vent Duct Compatible (Intake & Exhaust)	Yes - Dual
Rigid/Smooth Interior Dryer Venting	Optional
T&P Relief Valve	Included


### ADDITIONAL FEATURES

ENERGY STAR® Qualified	Yes
Northern Cold Climate Specification	Tier 2

### SPECIFICATIONS

Intake/Exhaust Vent Diameter	6"
Condensation Drain Connection Size	3/4" Threaded
Condensate Outlet Location	Top Rear
Drainage Outlet Location	Bottom Left
Hot Water Outlet Connection Size	3/4" Threaded
Water Inlet Connection Size	3/4" Threaded
Water Inlet Location	Bottom Left
Water Outlet Location	Middle Left
Water Supply Pressure Range (PSI)	15 - 150
Tank Capacity (Gallons)	66
Tank Material	Stainless Steel
Wiring Port Location	Top Right
Voltage Rating	240V, 60Hz, 30A
Back-Up Heater Element Output (kW)	4
Max Current (Heater Element - HEATER Mode) (A)	23
Maximum Output (Hybrid - AUTO Mode) (kW)	6.2
Primary Heater Element Output (kW)	4
Color -	
Stainless Steel	S
Shipping Weight (Approx.)	263 Lbs.

NOTE: Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [electroluxappliances.com](http://electroluxappliances.com). Specifications subject to change.

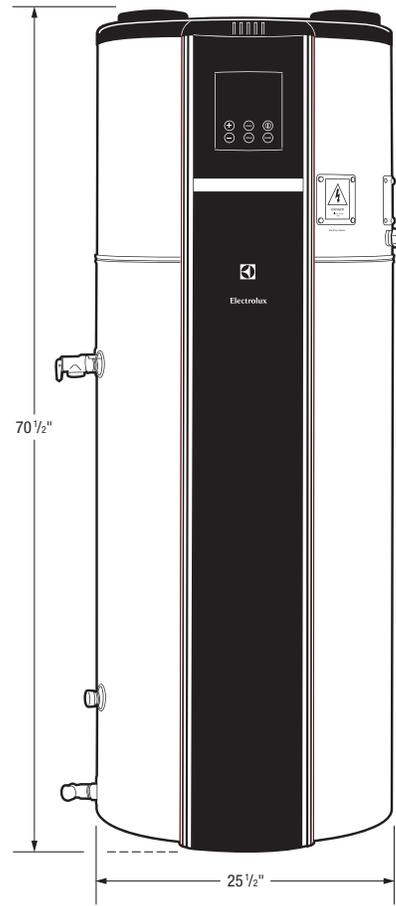

For complete Electric Hybrid Heat Pump Water Heater installation details, refer to Product Installation Guide on the web at [electroluxappliances.com](http://electroluxappliances.com)

### PRODUCT DIMENSIONS

Height	70-1/2"
Diameter	25-1/2"

FOR WATER HEATING INQUIRIES, PLEASE CONTACT ELECTROLUX WATER HEATING AT 1-888-360-8557.

## Electrolux Major Appliances, N.A.

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • [electroluxappliances.com](http://electroluxappliances.com)  
 CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • [electroluxappliances.ca](http://electroluxappliances.ca)

EE66WP35P 11/13

© 2013 Electrolux Home Products, Inc.



High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.